

Smart & Powerful MIC



MIC 750-3300 TL-X
















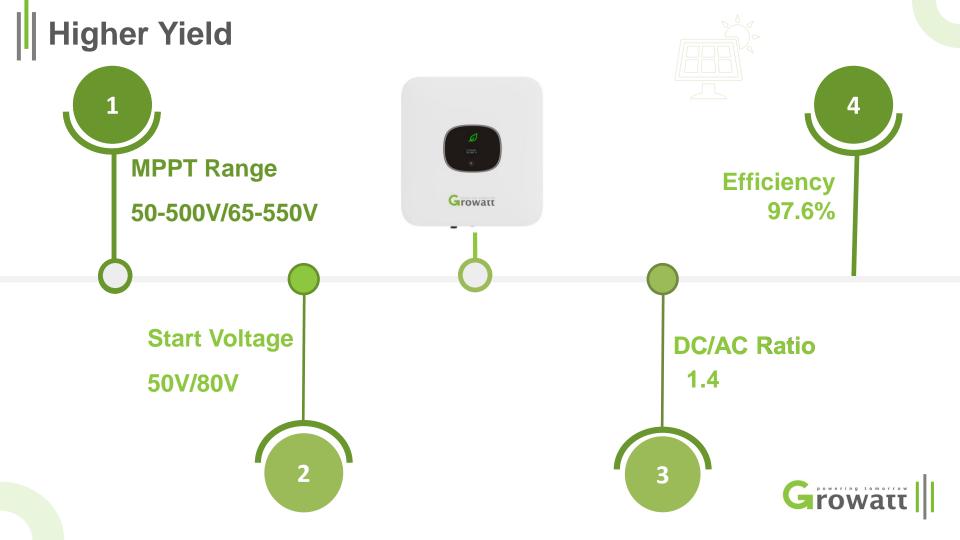

| Easy Installation



Compact, Smart & Optimized Design



User Friendly



Touch Button

- Excellent experience
- Touch to configure

OLED Display

- Clearly
- Low Consumption

Natural cooling

- ·Low noise
- ·Low consumption



Safe & Reliable



AFCI Optional






Reserve **Protection**





Convenient connection

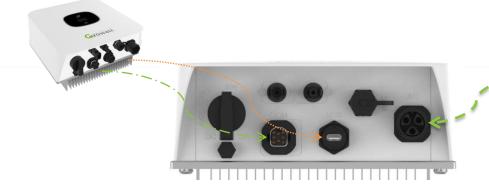



Quick installation and removal

COM Port

- RS485 and meter connection
- DRM or Logical interface

USB Port


- Monitor: WIFI-X, Shine LAN-X, ShineLink-X
- USB-WiFi/Firmware update



Dynamic export control


Dynamic export control with a meter



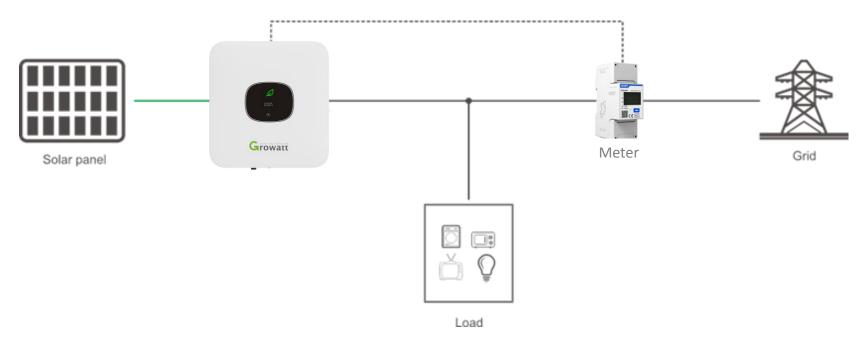



Self-Consumption Monitoring

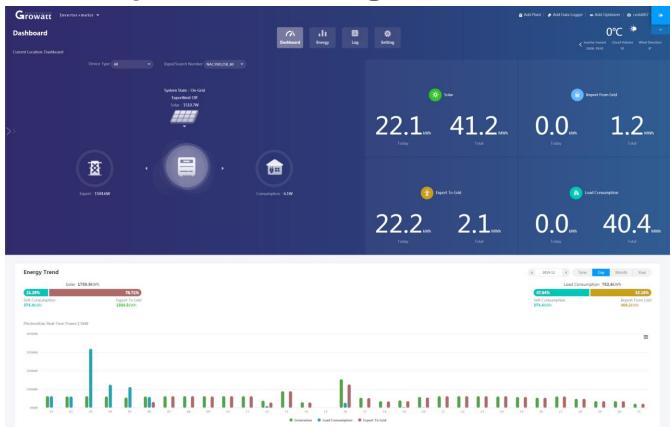





Easy Maintenance

✓ Smart Remote Maintenance

Remote Configuration



Remote FW Update

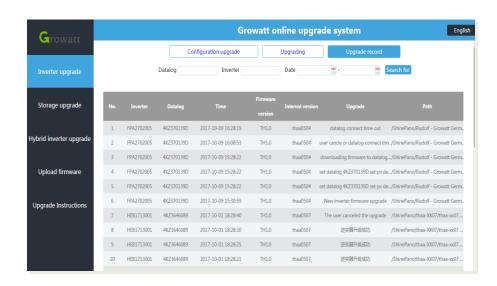

Growatt service engineer can handle 60%+ problems by Remote Configuration & FW Update



Easy Maintenance

- ✓ Local configuration : USB-Wifi
 - Local APP debugging: Check the real-time data and set parameter via local Wi-Fi network



Plug and play: Update inverter FW quickly (< 200s)



Smart Monitoring



















Copyright© 2019 Growatt New Energy Technology CO., LTD All Rights Reserved. The information contained in this document is only for reference purpose and subject to change by company officials.